




# Dynasty<sup>®</sup>

with **ArmourZone<sup>®</sup>**



Performance Shingles – Limited Lifetime Warranty<sup>1</sup>

## Wind Resistance and Fast Installation Nailed.

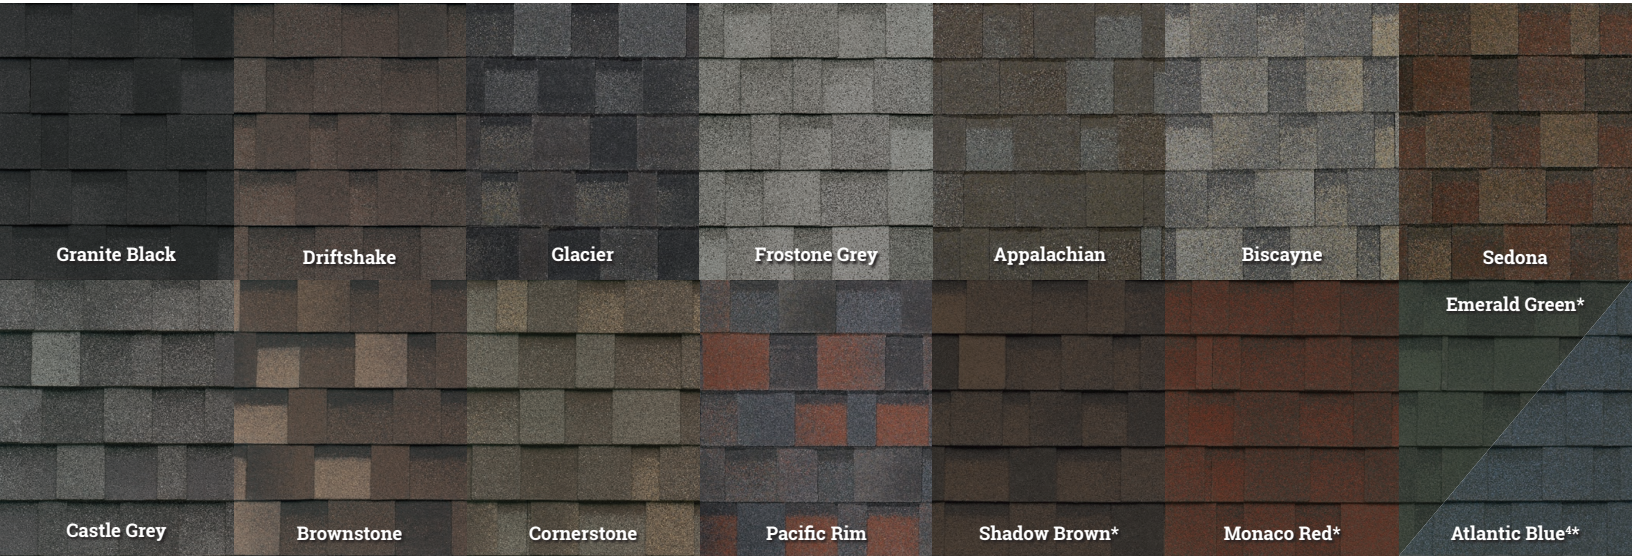

**IKO Dynasty performance laminate shingles** give you full coverage, lowering job costs associated with extra bundles and the labour to install them.

These oversized shingles are heavy-duty and are installed with a 5-7/8" exposure. Their special 1-1/4" reinforced nailing area (the ArmourZone) ensures incredible fastening power. They'll help resist nail pull-through even at high winds and carry a 210 km/h (130 mph) wind limited warranty<sup>1</sup> with the use of only four nails. IKO's special Fastlock™ sealant also helps resist water penetration and guards against wind uplift.

IKO's advanced colour blending technology creates distinctive hi-def colours that will make a home harmonize with its surroundings or truly stand out.

**5 7/8"** Exposure

**AZ** IKO<sup>®</sup> ArmourZone<sup>®</sup>

**High Wind Resistance**

**Full Coverage**  
(100 SQ FT/3 BUNDLES)

**Specifications<sup>2</sup>:**

**Dimensions (L x W): 1038 mm x 349 mm (40 7/8" x 13 3/4")**

Exposure: 149 mm (5 7/8")  
Coverage Per Bundle: 3.1 m<sup>2</sup> (33 1/3 ft<sup>2</sup>)  
Qty Per Pallet: 56 Bundles  
Shingles Per Square: 60  
Limited Lifetime Warranty<sup>1</sup>  
Iron Clad Protection<sup>3</sup>: 15 Years  
Limited Wind Warranty<sup>1</sup>: 210 km/h (130 mph)  
Blue-green Algae Resistant<sup>4</sup>

**Standards<sup>3</sup>:**

ASTM D3462  
ASTM D3018  
ASTM D7158 - Class H  
ASTM D3161 - Class F  
ASTM E108 - Class A  
CSA A123.5

**To ensure complete satisfaction**, please view several full size shingles and an actual roof installation prior to final colour selection as the shingle swatches and photography shown online, in brochures and in IKO's app may not accurately reflect shingle colour, and do not fully represent the entire colour blend range, nor the impact of sunlight.

<sup>1</sup>Colours coming soon.  
<sup>2</sup>See Limited Warranty at IKO.com for complete terms, conditions, restrictions, and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements.  
<sup>3</sup>All values shown are approximate.  
<sup>4</sup>Products developed with reference to these Standards.  
<sup>5</sup>Blue granules may fade after extensive exposure to the sun's ultraviolet rays.  
**NOTE:** Product and colour availability may vary by region. Please contact Roofmart for details. The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature. | 02/2019.

Distributed by  
**ROOFMART**

[www.roofmart.ca](http://www.roofmart.ca)

Manufactured by  
**IKO<sup>®</sup>**

[www.iko.com](http://www.iko.com)